



## LB1-UW06x-x Cabinet Loudspeakers



- ▶ **Good speech intelligibility and background music reproduction**
- ▶ **Available in black or white**
- ▶ **MDF construction**
- ▶ **With or without integral volume control**
- ▶ **Complies with international installation and safety regulations**

The LB1-UW06x-x is a 6 W, general-purpose, cost-effective loudspeaker for indoor use, with or without volume control. Keyholes at the rear are provided for quick and easy wall mounting. The angled front baffle results in a better sound in the listening area. The cabinet is available in black or white.

### Functions

The robust, solid MDF (medium density fiber board) enclosures are covered with a durable, easy-to-clean vinyl in a choice of white or black. The ABS fronts are covered with fine woven cloth in matching color. The angled front baffle results in improved high frequency reproduction in the listening area.

The speaker is available with or without a volume control.

### Certifications and Approvals

All Bosch loudspeakers are designed to withstand operating at their rated power for 100 hours in accordance with IEC 268-5 Power Handling Capacity (PHC) standards. Bosch has also developed the Simulated Acoustical Feedback Exposure (SAFE) test to demonstrate that they can withstand two times their rated power for short durations. This ensures extra reliability under extreme conditions,

leading to higher customer satisfaction, longer operating life, and much less chance of failure or performance deterioration.


Safety

acc. to EN 60065


### Installation/Configuration Notes

Three keyholes in the rear panel provide easy and quick wall mounting.


A convenient, easy-to-use, 4-pole push-in terminal block is on the rear panel for on-site wiring. This terminal block has provision for power tapping on the 100-volt, matching transformer in the cabinet. It allows selection of nominal full-power, half-power or quarter-power radiation (in 3 dB steps).

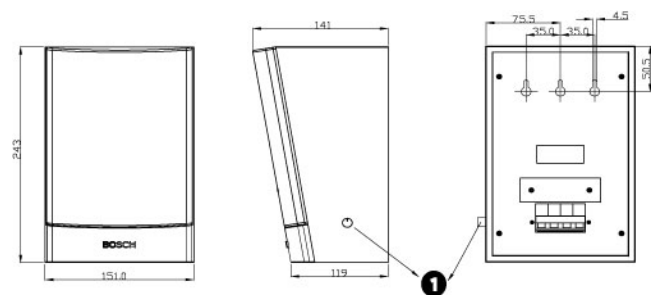


Dimensions LB1-UW06-x in mm showing volume control (1)

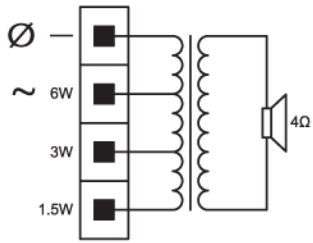


Circuit diagram LB1-UW06-x

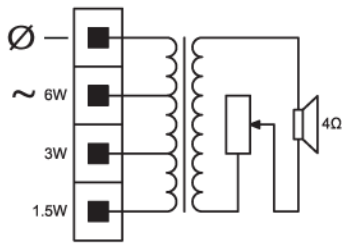


Circuit diagram LB1-UW06V-x

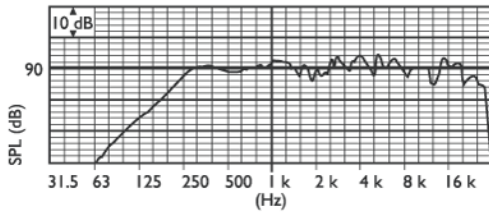

Frequency response

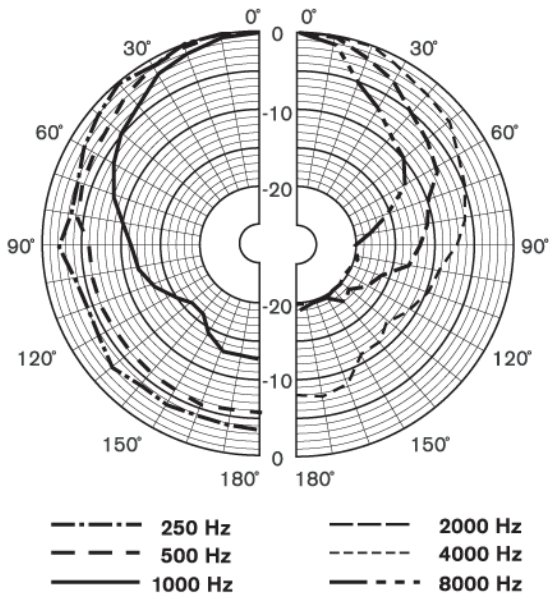

Polar diagram horizontal (measured with pink noise)

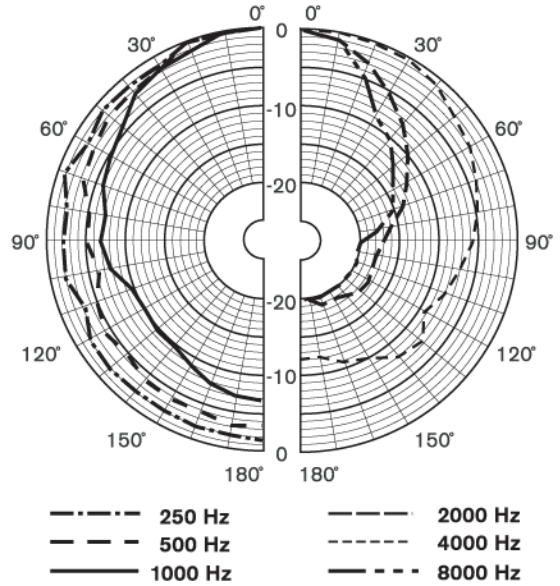

Polar diagram vertical (measured with pink noise)

### Technical Specifications

#### Electrical\*

Maximum power	9 W
Rated power	6 / 3 / 1.5 W
Sound pressure level at 6 W / 1 W (1 kHz, 1 m)	99 dB / 91 dB (SPL)
Effective frequency range	180 Hz to 20 kHz (-10 dB)
Opening angle horizontal	165° / 95°
Opening angle vertical	158° / 73°
Rated input voltage	100 V
Rated impedance	1667 ohm
Connector	4-pole push-in terminal block

\* Technical performance data acc. to IEC 60268-5

#### Mechanical

Dimensions (H x W x D)	243 x 151 x 141/119 mm (9.5 x 5.9 x 5.6/4.7 in)
Weight	0.9 kg (2 lb)
Color cabinet / cloth (D)	Black (D) or white (L)
Color cabinet / cloth (L)	Matches RAL 9004 / RAL 9004 Matches RAL 9010 / RAL 7044

#### Environmental

Operating temperature	-25 °C to +55 °C (-13 °F to +131 °F)
Storage temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative humidity	<95%

**Ordering Information****LB1-UW06-D Cabinet Loudspeaker**

6 W, black

**LB1-UW06V-D Cabinet Loudspeaker with Volume Control**

6 W, black.

**LB1-UW06-L Cabinet Loudspeaker**

6 W, white

**LB1-UW06V-L Cabinet Loudspeaker with Volume Control**

6 W, white

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Americas:**  
Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Asia-Pacific:**  
Bosch Security Systems Pte Ltd  
38C Jalan Pemimpin  
Singapore 577180  
Phone: +65 6319 3450  
Fax: +65 6319 3499  
apr.securitysystems@bosch.com  
www.boschsecurity.com

**Represented by**